


## 100 A & 200 A Overhead Service on Building

### GENERAL INFORMATION

**KV REMC ENGINEER MUST APPROVE METER LOCATION PRIOR TO INSTALLATION.**

**MEANS OF DISCONNECT MUST BE WITHIN 10' OF METER BASE.**

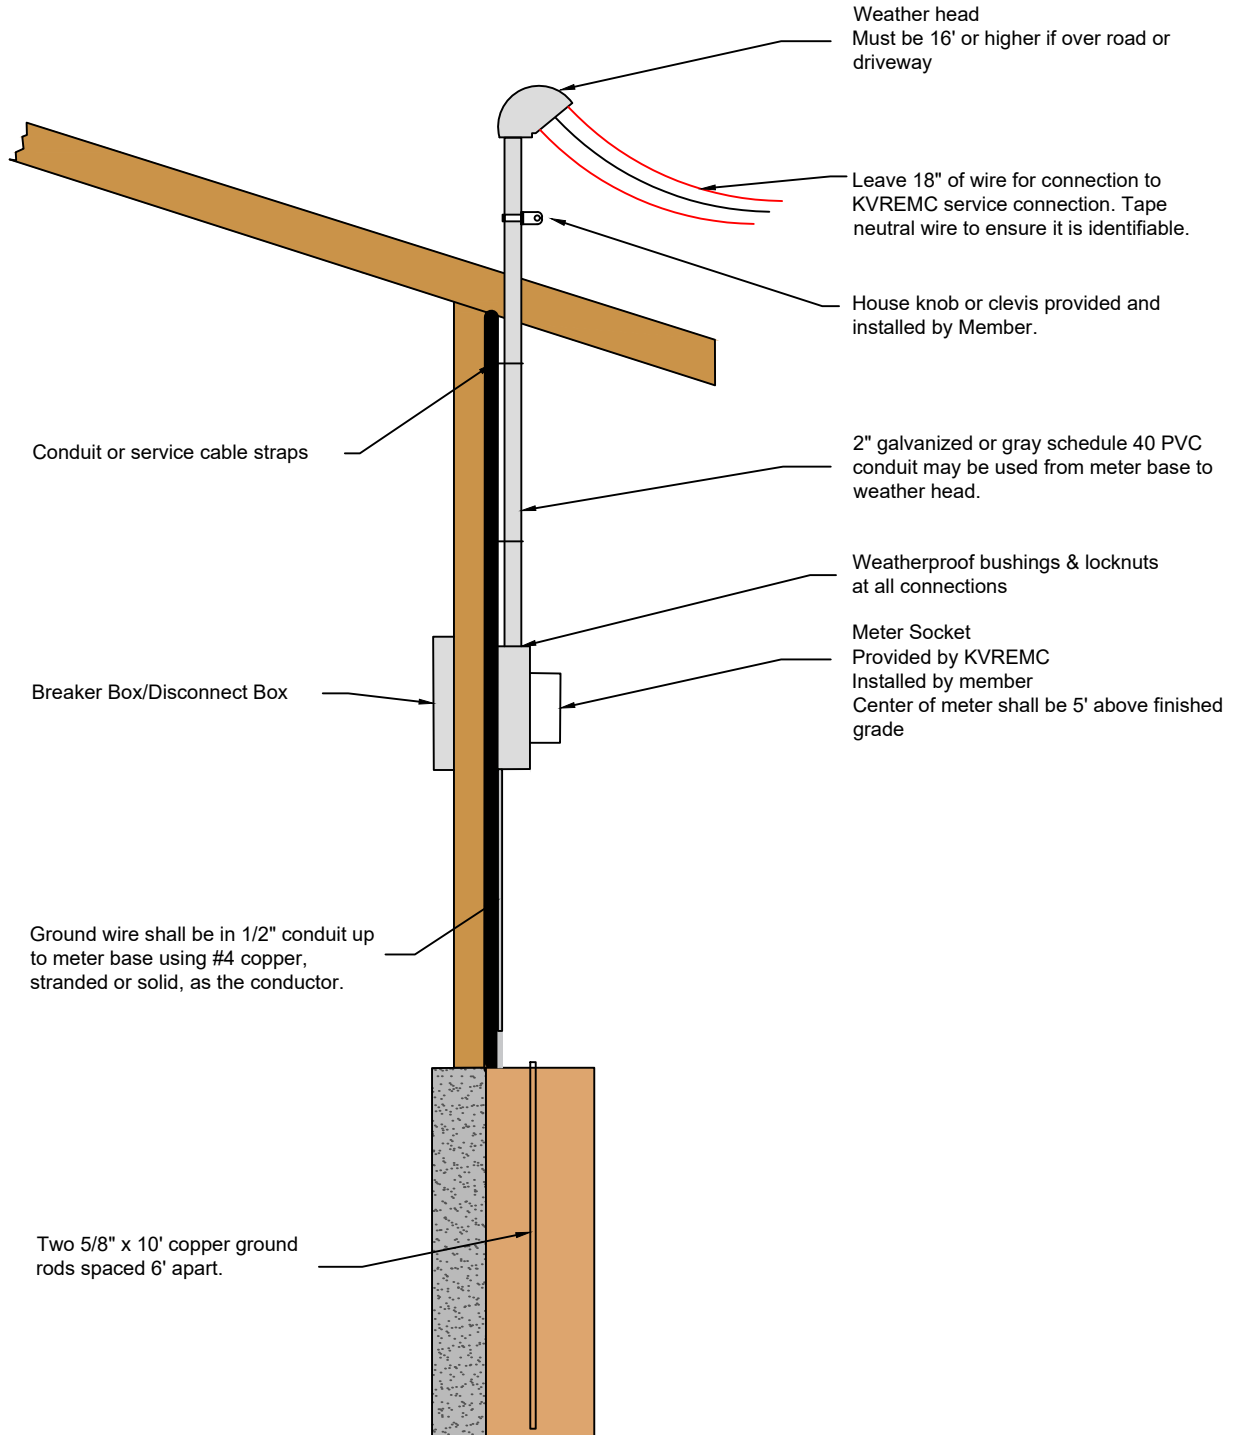

# SERVICE ENTRANCE GUIDE

SERVICE ENTRANCE SIZE	CONDUIT INTO METER BASE	1PH, 3W 120/240V	GROUNDING (COPPER ONLY, STRANDED OR SOLID)
<b>100A</b>	1.5"	#4 CU	#4 CU
	2"	#2 AL	#4 CU
<b>200A</b>	2"	2/0 CU	#4 CU
	2.5"	4/0 AL	#4 CU
<b>320A (2 - 200A) DISCONNECTS)</b>	3"	2/0 CU PER DISCONNECT	#2 CU
	3"	4/0 AL PER DISCONNECT	#2 CU

