


100 A & 200 A Overhead Service on Building

GENERAL INFORMATION

KV REMC ENGINEER MUST APPROVE METER LOCATION PRIOR TO INSTALLATION.

MEANS OF DISCONNECT MUST BE WITHIN 10' OF METER BASE.

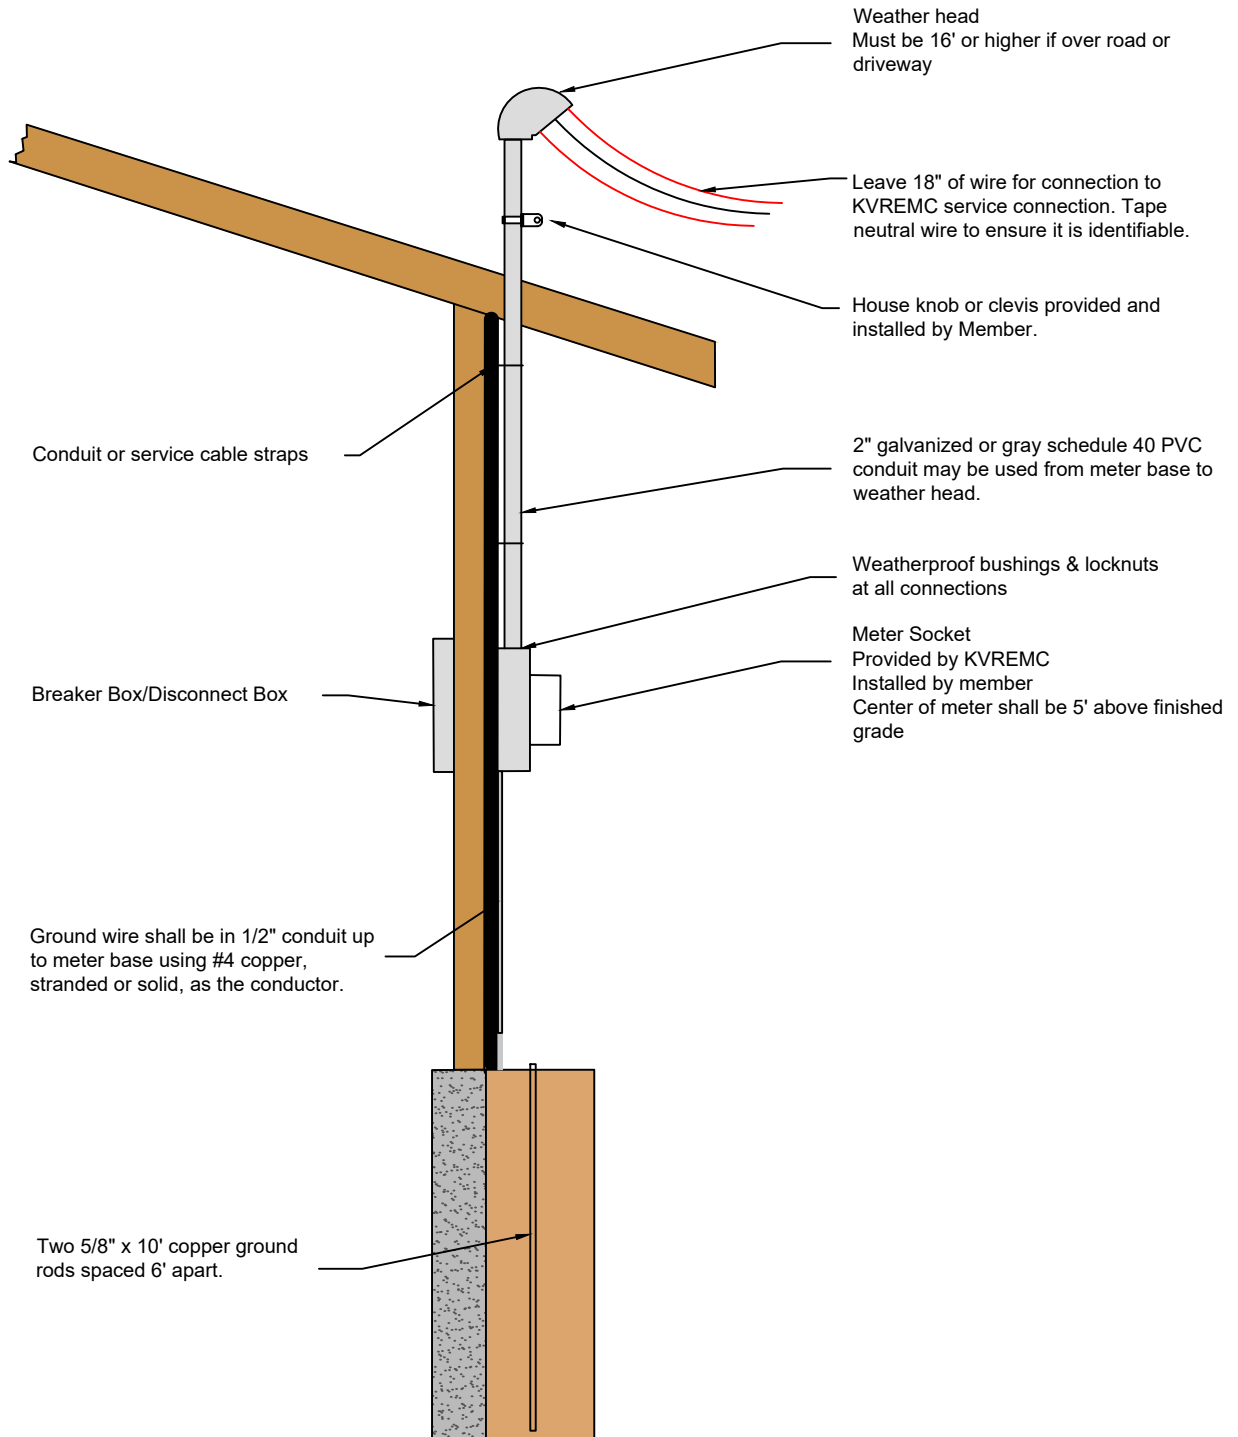

SERVICE ENTRANCE GUIDE

SERVICE ENTRANCE SIZE	CONDUIT INTO METER BASE	1PH, 3W 120/240V	GROUNDING (COPPER ONLY, STRANDED OR SOLID)
100A	1.5"	#2 CU	#4 CU
	2"	#2 AL	#4 CU
200A	2"	2/0 CU	#4 CU
	2.5"	4/0 AL	#4 CU
320A (2 - 200A) DISCONNECTS)	3"	2/0 CU PER DISCONNECT	#2 CU
	3"	4/0 AL PER DISCONNECT	#2 CU

